


POT MAGNETS WITH INTERNAL THREADING

They are a class of cylindrical permanent magnets, mounted concentrically in a steel frame. Their application can be different and they are normally used in adhesive applications.

Material	Alnico
Shape	Cylinder
Diameter (A)	17 - 40 mm*
Thickness (C)	16 - 35 mm*
Metrics (M)	6*
Tolerance	+/- 0,1 mm*
Magnetisation	Axial*
Quality	Alnico*
Max. working temperature.	350°C*

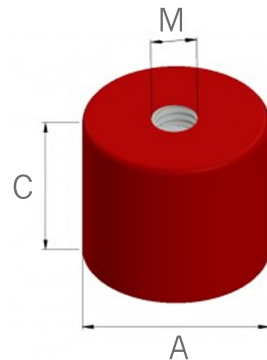

*These characteristics can be modified if they are tailor made.



WARNING

The use of permanent magnets is especially contraindicated for people who use pacemakers. Do not bring electronic devices, watches, credit cards, magnetic cards, calculators, precision instruments, or other magnetic materials close together, as this may irreversibly alter or damage their proper functioning.